

EV3 SEALED DRIVE OIL PRESSURE GAUGE AND SENSOR INSTALLATION INSTRUCTIONS



ICON KEY

CAUTION Tools may be required Shown in picture

1 PRESSURE SENSOR INSTALLATION

Disconnect batteries. Do not reconnect battery power until the system is fully configured to avoid risk of shock or fire.

2 Find a location where oil pressure can be measured, such as a test port near the oil filter, or on the HPOP reservoir on a system with HEUI injection. This may require adapter fittings to accommodate the 1/8" NPT sensor threads.

Only use this sensor and gauge for applications that will not exceed 400 psi of pressure.

3 Install the new sensor. Pressure sensor threads are 1/8" NPT.

Many Emission Control Devices are connected to OEM sensors or switches. Be careful not to disable these when installing a sensor.

4 If leakage occurs at the sensor, tighten one-quarter turn at a time until leakage stops. If necessary, thread sealant such as Teflon tape may be used.

When using a torque wrench, tighten approximately 4.4 – 6.6 lb.-ft [6-9Nm]. or slightly more if leakage occurs. Do not use the body of the sensor to tighten! Use only the hex and the correct wrench. Do not over tighten!

5 Plug harness into pressure sensor.



6 Route the pressure sensor harness' black, green and red/yellow wires to and through the firewall to the intended gauge location. Grommets usage is recommended. Secure all wiring so that it does not interfere with moving parts or chafe on sharp edges. This may be accomplished by routing the wiring within the factory wire harness sheath, using wire ties, and sheathing, and using appropriate grommets when passing through the firewall.

7 GAUGE INSTALLATION


Connect the 6-pin sealed connector to the back of the gauge (with the gauge near its final mounting location), then route the sensor portion of the harness towards the firewall and the red, orange, black and brown wires with cut ends towards the fuse panel or other area where the power, dimmer, ground and optional output relay connections will be made, leaving enough length at the 6-pin connector to allow you to remove the gauge from the mount without unplugging it from the gauge




Form No. IS284 (Rev. A 06/11/2024)

 WIRING DIAGRAM

Wires to be connected as follows:

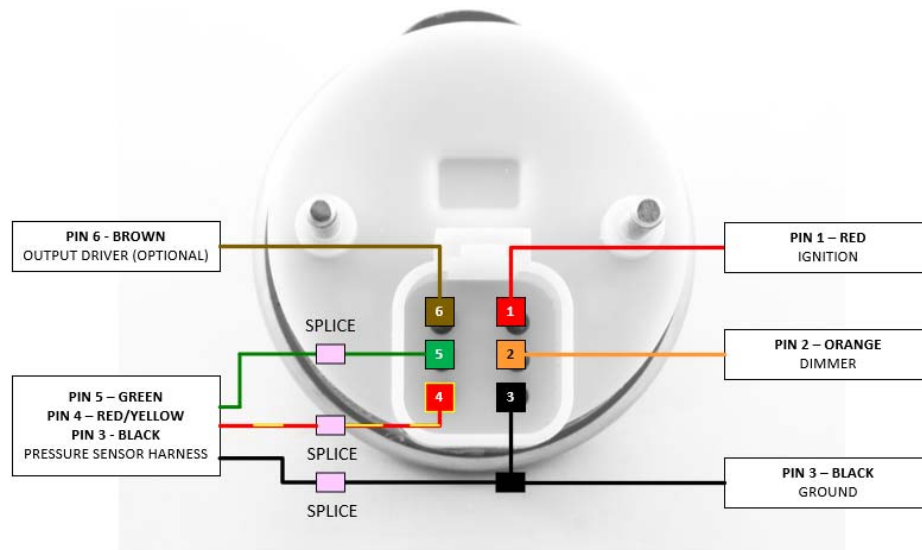

- **PIN 1 – Red: Ignition:** Connect to one wire of the included fuse holder using the included crimp splice, and the other wire of the fuse holder connected to a circuit that switches on with the key switch. Install the included 1-amp fuse in the fuse holder.  **Use only 1-amp fuses, higher amperage fuses may cause damage to the gauge or to the vehicle.**
- **PIN 2 – Orange: Dimmer:** Connect to the factory gauge dimmer circuit by either tapping into the in-cab fuse block or by connecting directly to the wire running from the dimmer on the headlight switch. **NOTE:** The gauge backlighting will only illuminate if both the ignition AND the dimmer circuits are on.
- **PIN 3 – Black: Ground:** Connect 1 wire to a clean ground on the vehicle such as the battery negative terminal or a factory ground bolt. Splice the other black wire to the black lead wire on the pressure sensor harness.
- **PIN 4 – Red/Yellow: Pressure Sensor:** Splice to the Red/Yellow pressure harness wire
- **PIN 5 – Green: Pressure Sensor:** Splice to the Green pressure harness wire
- **PIN 6 – Brown: Programmable Output Driver:** can switch devices that draw up to 1.3 Amps (60V) so a 1A (1 Amp) fuse should be used. **Devices** include customer supplied Relay Coils, Solenoids, Warning Buzzers, and Lamps. These devices are not included in gauge kits. The Output Driver activates these devices at a programmed level. When wiring to polarized devices always wire pin 6 to the negative side of the device.

For battery connection: Wire pin 6 to one side of the **device (see above)** with the other side of the device wired to a positive battery connection fused for no more than 1A.

For ignition connection: Wire pin 6 to one side of the **device (see above)** with the other side of the device wired to a connection that switches on with the key switch fused for no more than 1A.

9

EV3 ATTRIBUTE PROGRAMMER INSTALLATION

Android - Open the Google Play Store application. In the Search box, type “Attribute Programmer”. Select the **EV3 Attribute Programmer** from ISSPRO and install it on your device.

iOS (Apple) - Open the App Store. In the Search box, type “Attribute Programmer”. Select the **EV3 Attribute Programmer** from ISSPRO and install on your device.

ONCE INSTALLED - APP INSTRUCTIONS ARE LOCATED IN “EXTRAS”